
Privacy / One Way Mirror Film
Application and Technical Datasheet

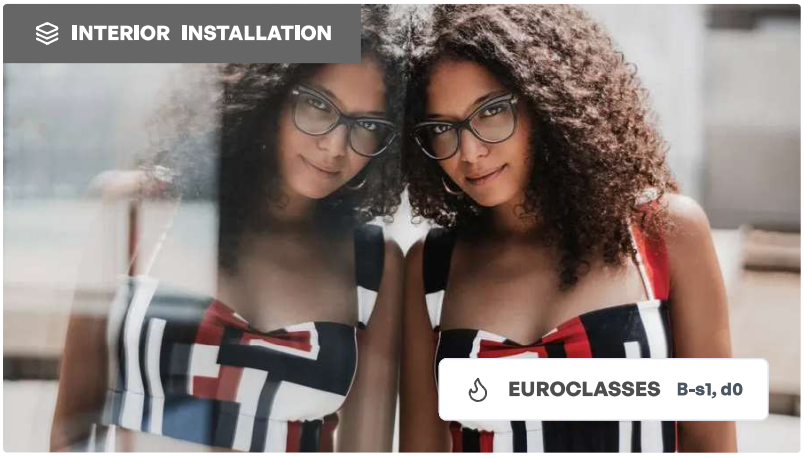

DESCRIPTION

one-way mirror film. Mirror effect on the exterior during daytime, total privacy from the street. 7% VLT. Interior application.

DURABILITY
Manufacturer warranty: 10. Actual service life depends on exposure, glazing quality, correct installation and maintenance.

MAINTENANCE
30 days after installation.

STORAGE
2 years from delivery. Store away from excessive humidity and sunlight, at a temperature below 38ºC.

APPLICATION METHOD

The surface to be bonded must be free of dust, grease, or any other contaminant. Some materials like polycarbonate can cause bubbling. A compatibility test is therefore recommended.

GLAZING COMPATIBILITY

SINGLE	TEMPERED	DOUBLE <1.20M	DOUBLE >1.20M	LAMINATED

GLAZING COMPLIANCE

Glazing exposed to the sun must be of good quality and installed in compliance with glazing standards to guarantee the performance and durability of the film.

IMPORTANT NOTE

To ensure perfect uniformity across a project, it is recommended to exclusively use films from the same production batch and not mix different widths. Slight variations in tint or appearance may occur from one batch to another or depending on the widths, which could lead to visible differences once the strips are installed side by side.

APPLICATION INSTRUCTIONS

1. Clean the window surface thoroughly, spray with water and then wipe with a piece of kitchen roll.
2. Cut the film using a knife 2-3 cm bigger than the size of the window.
3. The film has a very thin clear backing liner. To remove this get 2 pieces of adhesive tape and apply one to each side of the film in a corner, pull back on one of the tape pieces to start to remove the backing liner.
4. When the backing liner has been removed use a bottle spray and coat the adhesive side with application fluid or soapy water.
5. Apply the adhesive side of the film to the window.
6. Spray the film with water, this will allow the squeegee to glide along the film's surface.
7. Begin at the top, and squeegee down from the central part towards the edges.
8. Cut the film again, now to the size 2mm smaller than the window so it does not touch the frame, and glide with the squeegee once more.

PERFORMANCE EN 410

SUPPORT	PET
SUPPORT THICKNESS	60
PROTECTOR	Silicone PET
THICKNESS PROTECTOR	23
ADHESIVE	Acrylic polymer
COLOR	Silver mirror
APPLICATION FACE	Interior
VLT	7%
GUARANTEE	10
APPLICATION TEMPERATURE	+ 5ºC
APPLICATION	Soapy water

WARRANTY 10 years

This document has been produced by **MDP Supplies** based on information supplied by the manufacturer of this product. MDP Supplies can therefore not be held responsible for any errors or omissions.
©MDP Supplies 2026

These films are produced under careful quality control and are warranted to be fit for the purpose and free from defect in material and workmanship.
Any material shown to be defective to our satisfaction at the point of sale shall be replaced free of charge. The manufacturers liability to the purchaser shall